



Cierrapuertas opcional



SECURITY

The best solution for high-traffic areas

+POINTS

- Wide range of standard dimensions in two different heights in order to 'economize' projects. This is reflected in a great combination quality/price. Non-standard dimensions in order to adapt the door to any need.
- Torsional rigidity of the door leaf higher than that of traditional assembling method.
- Galvanized sheet metal and paint with a high corrosion resistance and durability.
- **Thermal insulation 1.2 (W/m²k).**
- Open Z frame for an easy installation.
- Excellent serial hardware. Includes a self-closing hinge.
- Great variety of hardware in stock (see hardware catalogue).
- Tested for up to 200.000 opening and closing cycles. Certified as a whole.

CERTIFICATES

- **Fire resistance** of 60 and 90 min according to the European Norm EN 1634-1:2000 and ANSI/UL 10B-2009 "Fire Tests of Door Assemblies".
- **Durability certificate C5** according to the European Norm EN 14600:2005.
- Certificate ISO 9001:2008

DOOR LEAF

- Galvanized steel sheets 0.7/0.9 mm thick, profiler-assembled by double folding and stitching together the LID-TRAY set.
- Also available in stainless steel.
- High density rock wool insulation, 145/180 kg/m³.
- Galvanized steel stiffeners.
- Hexagonal 14x36 mm zinc plated anti-leverage bolt.
- Door thickness: 51 mm, approx.
- Leaf bottom prepared for the installation of a guillotine.



SECURITY

The best solution for high-traffic areas



DOOR FRAME

- Reduced thermal conductivity galvanized steel, 1.5 mm thick.
- Z-shaped jambs and lintels. ASTURMADI special profile.
- 230x1.5 mm cold-laminated steel plate fastening anchors, especially designed to be fitted in any kind of wall.
- 50x2.5 mm steel door threshold.
- 'U' shape frame configuration available.
- Telescopic piece adjustable to fit all wall widths also available.



RAL 7038 gris



.... más de 150 colores

FINISHES (no inox)

- Sheet painted with thermosetting epoxy powder.
- 100 micron coat of paint on the leaf and 120 on the frame.
- Standard color RAL 7038 grey.
- Color RAL 9010 white without additional cost (consult).
- ANTIBACTERIAL paint with silver nitrate added available.
- Full RAL color chart.

SECURITY

The best solution for high-traffic areas



Standard ACCESSORIES

- 3 mm thick steel hinges, welded to the frame and fixed onto the leaf with M6x16 zinc plated screws. The lower hinge is self-closing.
- 15x2.5 mm graphite intumescent joint. It dilates 25 times its size at temperatures greater than 150°C.
- Reversible inlay fire resistant lock protected by two MO Stucal boards.
- Sintered steel latch.
- 40x40 brass cylinder lock with 3 keys.
- Handle
 - Anti-snag fire resistant handle.
 - Steel core covered by fusion.
 - Metal shields covered with nylon. Bolts and nuts.

Optional ACCESSORIES


- Stainless-finish hinges adjustable in height (with allen wrench).
- Lock with stainless-finish front.
- Stainless steel high quality handle (SENA AISI 304 Serie).
- SENA AISI 316L Serie also available (check prices).
 - Rosette and square plates available (check prices).
 - Round or rectangular vision panels in a great variety of dimensions (available in stainless steel).
- Wide range of antipanic devices. (available in stainless finish).
- Door closers.
- Guillotine (acoustic kit).
- Stainless steel plinths (bottom or center).

SECURITY SINGLE



The best solution for high-traffic areas



DIMENSIONS

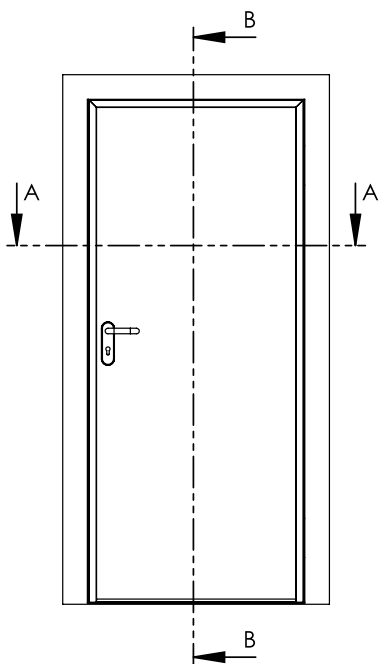

WIDTH			
CLEAR PASSAGE	A	RECOMMENDED S.O.	TOTAL DIMENSION
600	665	680	725
700	765	780	825
810	875	890	935
900	965	980	1025
930	995	1010	1055
1000	1065	1080	1125
1100	1165	1180	1225
1200	1265	1280	1325
HEIGHT			
CLEAR PASSAGE	B	RECOMMENDED S.O.	TOTAL DIMENSION
2000	2045	2050	2075
2100	2145	2150	2175

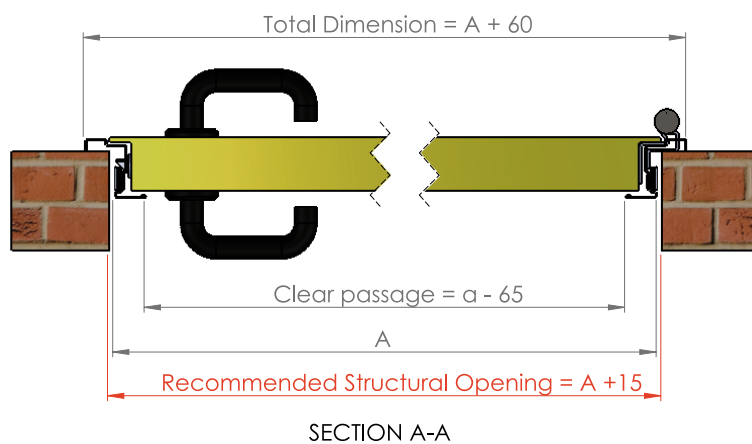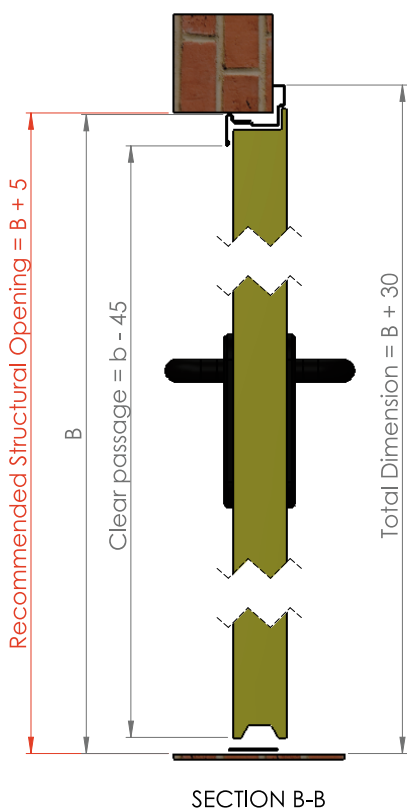


SECURITY DOUBLE

The best solution for high-traffic areas



DIMENSIONS

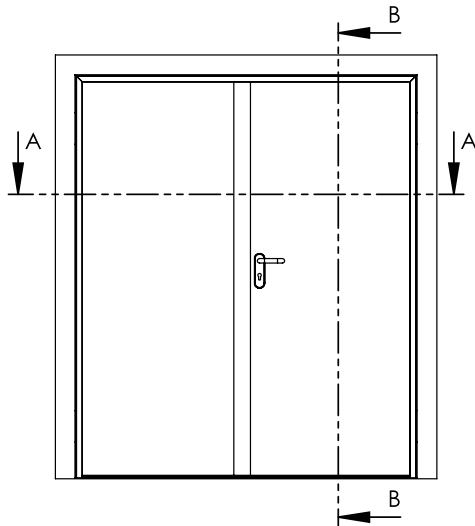

WIDTH						
CLEAR PASSAGE				A	RECOMMENDED STRUCTURAL OPENING	TOTAL DIMENSION
ACTIVA	PASIVA	+45	=			
600	600			1245	1310	1325
700	600		1345	1410	1425	1470
700	700		1445	1510	1525	1570
810	700		1555	1620	1635	1680
810	810		1665	1730	1745	1790
900	810		1755	1820	1835	1880
900	900		1845	1910	1925	1970
1000	900		1945	2010	2025	2070
1000	1000		2045	2110	2125	2170
1100	1000		2145	2210	2225	2270

HEIGHT				
CLEAR PASSAGE		B	RECOMMENDED STRUCTURAL OPENING	TOTAL DIMENSION
2000				
2100		2145	2150	2175

